

## RSF2000 Commercial Air Purifier Overview and Specifications

ISO-Aire clean air technology is the ideal solution for healthcare, education, commercial, and other facilities to protect employees, patients and customers from air contamination and infectious airborne pathogens. The medical-grade filtration system has the capacity to accommodate rooms and spaces of all sizes and configurations. ISO-Aire provides clean air to indoor spaces in a high-performance, quiet and quick to install unit with an unmatched level of protection.



### Medical-grade design with 3 levels of protection

- 99.99% HEPA and optional ozone-free bipolar ionization and/or UVC sterilization provides industry leading protection
- Recommended ASHRAE and CDC mitigation strategy
- Up to 2,000 CFM
- Quality, long-life components



### Quiet operation

- Variable-speed ECM fan
- Low-noise, produces only 37-60 dBA
- Sound attenuated



### Easy and safe

- Variety of control options
- Simple maintenance
- Rapid deployment



### Quick to install

- Quick production lead time
- 110 voltage with grounded plug
- Color options available



## Enclosure

### Standard Unit Dimensions:

- 30" W x 30" D x 85.25" H

*If ordering outlet discharge instead of grille, deduct 18" from H dimension*

### Weight:

- Approx. 350 lbs. (without UVC)
- Approx. 360 lbs. (with UVC)

### Enclosure Material:

- 22 gauge embossed steel or stainless steel

## Medical-Grade Filtration

- HEPA's 99.99% (24" x 24" x 6") x 2
- MERV-8 pre-filters (24" x 24" x 2") x 2
- Optional ozone-free bipolar ionization
- Optional UVC sterilization

## High-Powered Fan

- Full load amps – 13.6
- Volt/Ph/Hz – 110/1/60
- Up to 2,000 CFM
- 1 HP

## Controls

### Standard Controls:


Simple monitoring of the filter pressures. Local running lights and ECM fan motor speed control.

### Control Option R1:

Control uses differential pressure across filters to automatically adjust fan speed to maintain desired airflow.

### Control Option R2:

Upgraded network type controller to allow for system visibility to the facilities Building Automation System (BAS) via IP address. The IP address is selectable/changeable by the owner to add to their network. Simple graphics and analog values of filter pressure. Some installation required.

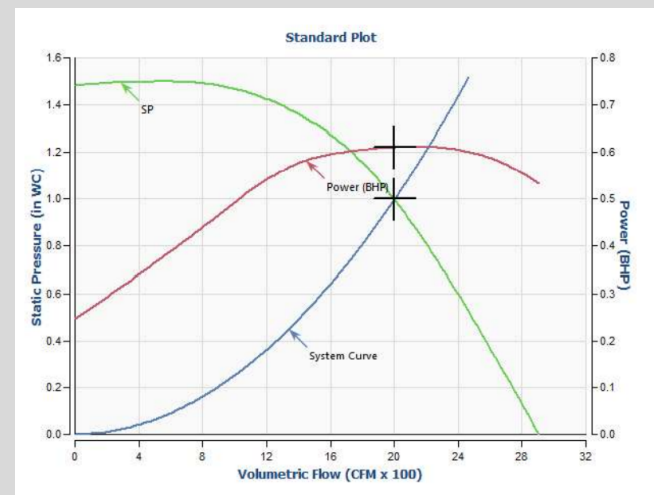

*\*In an effort to meet demand due to COVID-19, fan sources may vary*